



Video Measuring Microscope for precision 3-axis measurement

- 50 years of proven optical experience, packed into a powerful 3-axis non-contact video measuring system
- High accuracy, value-for-money system
- Powerful and intuitive with amazing simplicity
- Compact, robust system with small footprint

3-Axis Video Measuring Microscope

Vision Engineering's Falcon incorporates over 50 years of proven optical experience, in a powerful 3-axis non-contact measuring system. Falcon delivers cost-effective, accurate results, with amazing simplicity.

Vision Engineering has packed massive technical capabilities into a small and compact system, yet Falcon is suitable for both shop-floor quality control and manufacturing inspection applications. From simple, single-feature operation to multi-point video edge detection, Falcon delivers accurate and repeatable results in 3 axis for a wide range of precision measuring applications.

- High repeatable accuracy 3-axis measuring system
- 'Best-in-class' performance, with advanced capabilities, as standard
- Powerful, intuitive and affordable, delivering accurate results, with confidence
- High resolution indexed zoom optics offer precision and flexibility
- Large field of view for easy sample orientation
- Progressive motorised Z-axis control
- Factory-completed NLEC* and SLEC† calibration

Powerful but simple



The powerful and intuitive touch-screen video microprocessor is suitable for both multi-user shop-floor use and advanced manufacturing inspection applications.

Fast but accurate



A high precision NLEC-calibrated* measuring stage ensures accurate results in X & Y axes, with unique camera iris control and SLEC† calibration ensuring superb accuracy and repeatability of Z-axis results.

High Spec but affordable



From the start, Falcon was designed to fit your budget without compromising quality. Expect to pay more for other comparable accuracy and specification systems.

Key features at a glance...

| Camera/Optics | |
|------------------------|--|
| Camera | High resolution colour CCD camera with 5:1 zoom ratio |
| Camera Iris | 5-position indexed camera iris allowing increased Z-axis accuracy and enhanced component edge definition |
| Standard Magnification | 10x - 50x 20x - 100x |
| Field of View | 13.5mm (max.) 6.75mm (max.) |
| Zoom Indexing | Repeatable 5-position indexed zoom |

| Measurement | | |
|--------------------------|--|---------------|
| | 150mm x 100mm | 150mm x 150mm |
| NLEC* Stage Calibration | Standard | Standard |
| X/Y Quick Release | - | Standard |
| Maximum Stage Load | 10kgs | 15kgs |
| SLEC† Z-Axis Calibration | Standard | Standard |
| Z-Axis Capacity | 125mm | 115mm |
| Z-Axis Control | Progressive motorised Z-axis for fine and rapid movement | |

| Illumination | |
|--------------|--|
| Surface | Controllable quadrant LED illumination for detection of low-contrast edges with high precision - long-life LEDs with 10,000+ hours illumination |
| Substage | Controllable LED illumination with 5-position indexed iris, for accurate profile measurement - long-life LEDs with 10,000+ hours illumination |

| Processor | |
|-----------------------|--|
| Part Programming | Programme a measurement sequence to measure the same points per feature, in the identical sequence, part after part. |
| Geometric Tolerancing | Easy-to-view graphical representation instantly views pass/fail performance details for critical part dimensions. |
| Image Capture | Image capture (in JPEG format) to either internal memory or directly to USB port. |

| Accessories | |
|------------------------|---|
| Footswitch | 'Plug & play' footswitch option for hands-free data entry |
| Substage Colour Filter | Standard 40.5mm colour filters to enhance edge definition of profiled or turned parts |

* Non Linear Error Correction

† Segmented Linear Error Correction

'Best-in-class' performance

Compact with a small footprint, Falcon incorporates many advanced features designed to increase accuracy and simplify operation, delivering performance normally to be found with more expensive systems.

Falcon includes both surface and substage iris aperture control, motorised Z-axis movement, controllable quadrant LED illumination and both high and low magnification lens options as standard.

Advanced zoom optics

Focusing on accuracy, Falcon employs high resolution zoom optics (up to 100x magnification) to provide enhanced component edge definition, with a unique indexed camera iris control allowing depth of field to be reduced, increasing accuracy and repeatability of Z-axis results. A large field of view (13.5mm max.) simplifies component location and orientation.

Precision measuring stages

Falcon, complete with Vision Engineering's renowned precision measuring stages include factory-completed non-linear error correction (NLEC) calibration as standard to ensure optimum accuracy, traceable to international standards for the purposes of ISO9000.

Edge detection/measurement tools

An advanced touch-screen colour video microprocessor provides an array of powerful video edge detection tools to speed up and simplify the measurement process, including crosshair, offset crosshair for difficult-to-find edges, manual or automatic single point detection and multi-point video edge detection for measurements both inside and outside the field of view.

Controllable quadrant LED illumination

Controllable quadrant LED surface illumination optimises lighting conditions, enhancing edge definition, inclusions and fine scratches, with an indexed substage iris aperture allowing precise edge contrast of profiled and turned parts.

Fully controllable surface and substage illumination can be programmed as part of a measurement routine, ensuring accurate and repeatable measurements.

Construction and ergonomics

Falcon's robust, dynamically engineered design reduces stress points to optimise accuracy. Rugged in construction, the sealed unit has been designed to cope with the demands of a busy production environment.

All controls feature a soft-touch silicone finish, ergonomically positioned to reduce head, hand and body movement and resulting fatigue.



Measurement Uncertainty

Repeatable accuracy in X and Y axes, 4µm or better

- Uncertainty formula $U_{95}2D = 3+(6L/1000)\mu\text{m}$
where L = length in mm, using controlled conditions

High performance Z-axis accuracy, varying according to subject, operator and conditions

Video Camera

High resolution colour CCD camera with 5:1 ratio, 5-position indexed zoom and iris aperture control

Optical Data

| Zoom Magnification Range | 10 - 50x | 20 - 100x |
|--------------------------|----------|-----------|
| Maximum field of view | 13.5mm | 6.75mm |
| Minimum field of view | 2.7mm | 1.35mm |

Illumination

- Quadrant controllable surface illumination provided by 20 (4 banks of 5) x high intensity LEDs (10,000+ hours)
- Controllable substage illumination provided by 1 x high intensity LED (10,000+ hours)

Stage Capacities

- 150mm x 150mm x 115mm (15kgs maximum load)
- 150mm x 100mm x 125mm (10kgs maximum load)

Encoder Resolution

X = 1µm Y = 1µm Z = 1µm

Power

Power supply: 85 - 264V AC 47/63Hz

System Weight


- Falcon with 150mm x 150mm stage 24.5kgs
- Falcon with 150mm x 100mm stage 19.0kgs



Precision manufactured in the EU

Dimensions

- A = 286mm
- B = 220mm
- C = 220mm
- D = 410mm (150mm x 100mm stage)
415mm (150mm x 150mm stage)
- E = 530mm (150mm x 100mm stage)
535mm (150mm x 150mm stage)
- F = 530mm max.
- G = 125mm max. capacity (150mm x 100mm stage)
115mm max. capacity (150mm x 150mm stage)

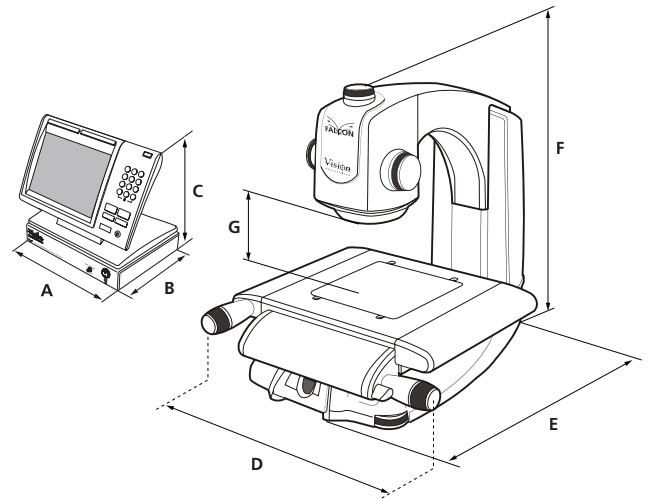

150mm x 150mm measuring stage illustrated

For more information...

Vision Engineering has a network of offices and technical distributors around the world. For more information, please contact your Vision Engineering branch, local authorised distributor, or visit our website.

Distributor

ryf ag



Ryf AG
Bettlachstrasse 2
2540 Grenchen
tel 032 654 21 00
fax 032 654 21 09

www.ryfag.ch

