



MORE LIGHT

JENOPTIK GRYPHAX® ALTAIR

# Explore your micro universe cost efficient with 3 & 12 MPix.

## Camera properties

Sensor Size	✓	✓	✓	✓
Sensitivity	✓	✓	✓	✓
Frame Rate	✓	✓	✓	✓
Resolution	✓	✓	✓	✓



color



uncooled



inactive

## Recommended: Applications

Life & Medical Science	✓	✓	✓	✓
Education Life & Medical Science	✓	✓	✓	✓
Material & Manufacturing	✓	✓	✓	✓
Education Material & Manufacturing	✓	✓	✓	✓
Fluorescence	✓	✓	✓	✓
Education Fluorescence	✓	✓	✓	✓

## Contrast techniques


BF	✓	✓	✓	✓
DF	✓	✓	✓	✓
DIC	✓	✓	✓	✓
Ph	✓	✓	✓	✓
Pol	✓	✓	✓	✓

# JENOPTIK GRYPHAX® ALTAIR - technical data


## Superior solution for education applications

IMAGE SENSOR	
Type Square Utilised sensor diagonal	SONY back-illuminated CMOS 1/1.75" 9.3 mm
Pixel dimensions	1.85 x 1.85 µm
Color or monochrome	Color
Transfer method   shutter mode	All pixel scan   rolling shutter
CAMERA	
Camera resolution & speed in LIVE mode	1000 x 750 pixel   20 fps   2000 x 1500 pixel   20 fps
Camera resolution in RECORD mode	1000 x 750 pixel   2000 x 1500 pixel   4000 x 3000 pixel
Camera resolution & speed in VIDEO mode	2000 x 1500 pixel up to 20 fps
Exposure time LIVE min. - max.	52 µs - 1 s
Exposure time RECORD min. - max.	52 µs - 15 s
Gain	Max. 15
Cooling	NO
A/D conversion   digital output	10 bit (1024 grey values)   16 bit
Absolute sensitivity threshold*	5.7 e-
Quantum Efficiency @ 532 nm (green)*	0.57 QE (λ)
Dark Noise [DN / e-]*	0.5 DN / 4 e-
Saturation capacity*	10.000 e-
Dynamic range*	65 dB
Filter	IR cut   optional clear-glass
Power consumption	Appr. 4.5 W
Hardware Trigger	NO
Weight	Appr. 400 g
Power switch	Yes
Optical interface	C-mount
Dimensions	85 mm x 75 mm x 50 mm
Storage options	-20°C up to 70°C
Operating temperature	+10°C up to + 35°C non condensing
Warranty	24 months
Conformity to CE / WEEE / RoHS / China RoHS	Yes
RECOMENDED SYSTEM REQUIREMENTS	
Personal computer	Intel i7 (Quad-Core) processor or comparable / 8 GB RAM
Operating system -64 Bit	Win 7 SP1 / Win 8.1 / Win 10   MacOS High Sierra / Mojave   Linux Ubuntu 16.04 LTS
Data interface	USB 3.0 integrated, no extra power supply needed
Monitor resolution	3840 x 2160 pixel or higher
Software (included in the package)	Microscope software - GRYPHAX APP / Twain APP / DirectX APP / Software development kit

### Measured spectral sensitivity\*: Absolute

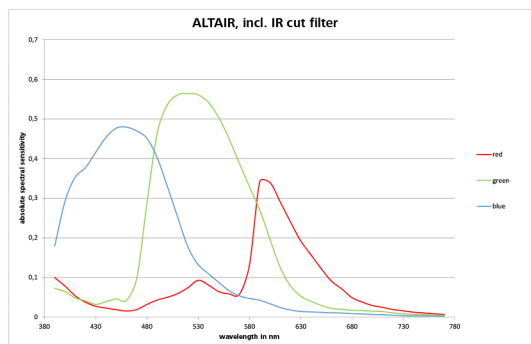

### Relative

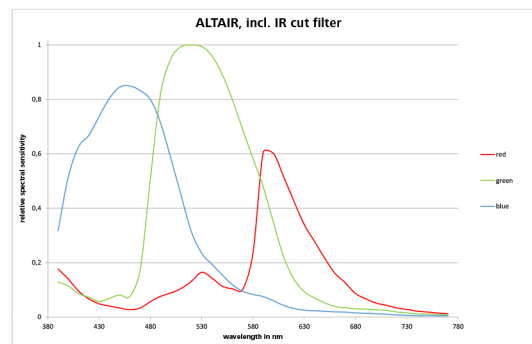

\*based on EMVA 1288 standard compliance guidelines

MICROSCOPY • METROLOGY SERVICES  
Suisse made



We show quality  
Nous rendons la qualité visible  
Wir machen Qualität sichtbar

Bettlachstrasse 2 | 2540 Grenchen | Switzerland  
phone +41 32 654 21 00 | +41 22 776 82 28  
ryfag@ryfag.ch | www.ryfag.ch

